



Household Cooler



Commercial Cooler  
Industrial Cooler



Industrial Evaporative Air Coolers



*Fresh, Filtered & Cool Air  
At Low Power Consumption*

## About Keruilai



▲ Keruilai China Headquarters

Keruilai was established in 2001 in Dongguan City, Guangdong Province, China. Owing to its relentless endeavor for the past 20-years, Keruilai has emerged as a renowned international entity with cutting edge manufacturing setup, state-of-the-art R&D hub and formidable sales network.

From the very beginning, Keruilai has been focused on the development and production of industrial, commercial, and household evaporative air coolers under one roof. Now, Keruilai can provide solutions for any kind of air cooling needs, ranging from 300CMH to 100,000 CMH airflow. Keruilai has its footprint in 50 countries across the globe and still counting.


Keruilai has the most advanced evaporative air cooling technology laboratories in the world consisting of air volume lab, air pressure measurement laboratory, noise measuring lab, etc. Keruilai's mastery on evaporative air cooling technology is undoubtable and as a thought leader in this industry, Keruilai is involved in drafting many industrial standards such as evaporative air conditioner national standards, air cooling fan national standards, etc.; Moreover, Keruilai owns more than 50 domestic invention patents of utility models and others.

Way back in 2003, as the pioneer in China EAC industry, Keruilai earned its ISO9001 international quality management system certification. Riding on its impeccable production and quality management system, Keruilai products obtained their due recognition by getting national CCC certification, CE certification, ETL certification, CSA certification, international electrotechnical CB certification, and quality certification. Keruilai products has also got prestigious national recognition as "green star products".

Over the years, Keruilai has built an enviable team of professionals with in depth knowledge and experience in R&D, production, sales and marketing domain. With its superior teamwork the company earned several recognitions like "Famous trademarks of Guangdong province", "Guangdong famous brand product", "Outstanding environmental protection enterprise of Guangdong province", "High-tech enterprise", "the national AAAA level standardization good industry enterprise", etc.

In 2011, a Swedish conglomerate, Munters Group invested in Keruilai and brought in its advance technology from Europe. In 2015, world's largest air cooling company, India based Symphony Limited took over Keruilai and re-christened it as Guangdong Symphony Keruilai Air Coolers Limited.

At this juncture, Keruilai is poised to take a big leap and rewrite history in the global air cooling industry with the widest product range, superior technological prowess and worldwide network.

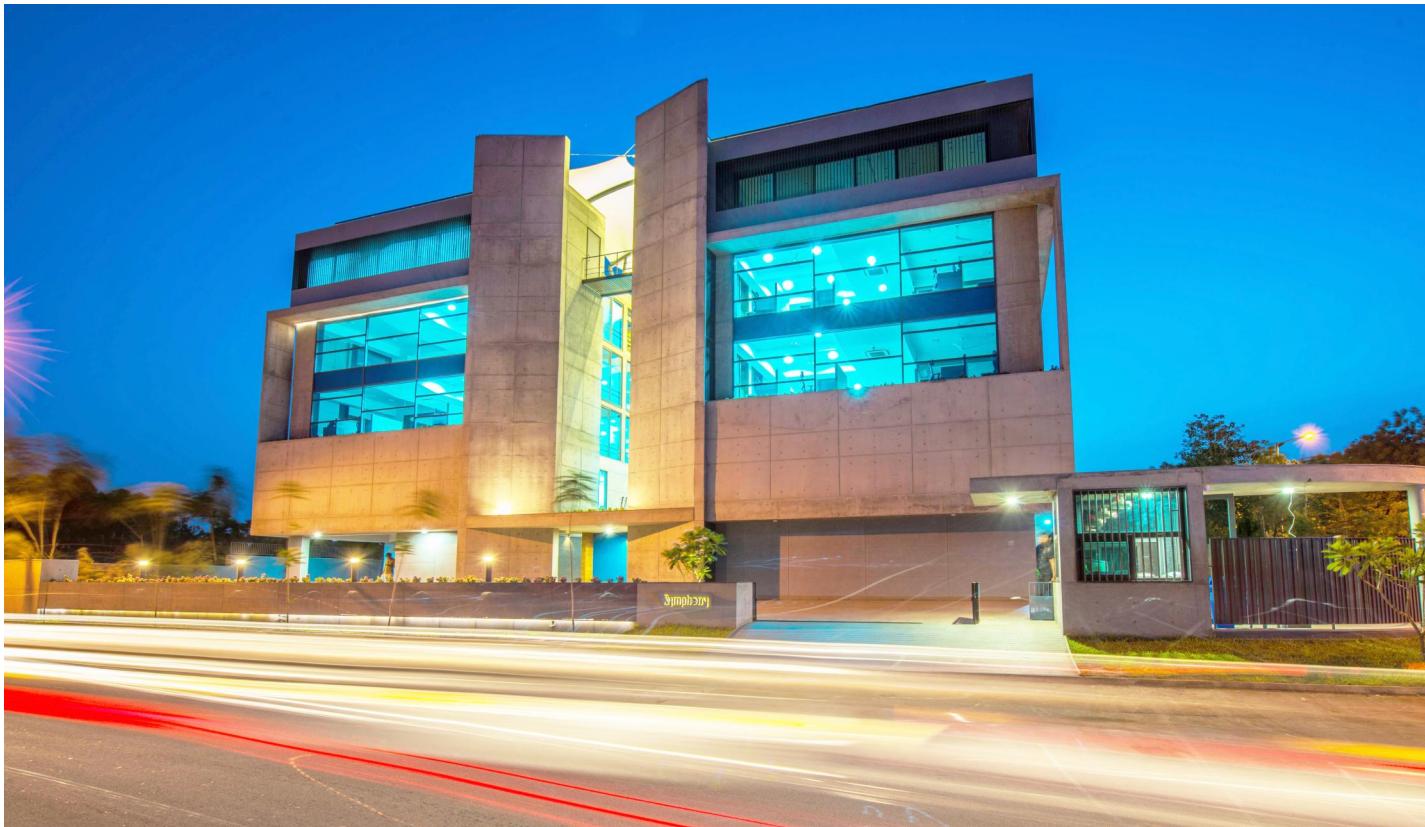

▲ Symphony Group India Headquarters



## About Symphony Limited

Keruilai's parent company Symphony Limited, is the world's largest evaporative air cooler manufacturer. Symphony's legacy can be traced back to the 1930s. in 1939, IMPCO, a member of Symphony group, invented the world's first evaporative air cooler. Symphony is the most respected air cooling brand in the world with market value of \$1.5 billion US dollars. Having manufacturing bases in North America, India, Australia Mexico and China, Symphony has its presence in over 60 countries around the world.



▲ IMPCO, Mexico



◀ Climate  
Technologies,  
Australia

Bonaire, USA ▶



# Keruilai Milestone



The first Evaporative Air Cooler Brand in China to meet the technology evaluation requirement of "Green Star Product".

2002



Obtained the first CE Certification (Mandatory EU Certification) to enter Europe market.

2006



China central leaders visited Keruilai.

2009



Awarded "National Advanced Enterprise of Quality Integrity Initiative"; Won the title of "China Famous Brand"; Introduced KF60-W70 & others.

2013



Authorized over 50 independent technological patents by 2015; The world leader in evaporative air coolers, Symphony Limited, acquires Keruilai; Introduced KM32 & others.

2015

2001



Year of Established.

2003



Passed ISO9001 Quality Management System.

2008



Won the title of "Guangdong famous brand product" and was rated as famous trademark of Guangdong province.

2012




Deputy head of the committee for drafting national standard "The safety of household and similar electrical evaporative air cooling fan and the special requirements of an evaporative air conditioner".

2014

Globally, more than 350,000 Keruilai industrial air coolers installed; Also, Keruilai led the committee to draft the national industry standard of evaporative air cooling; Introduced KM22 & others.



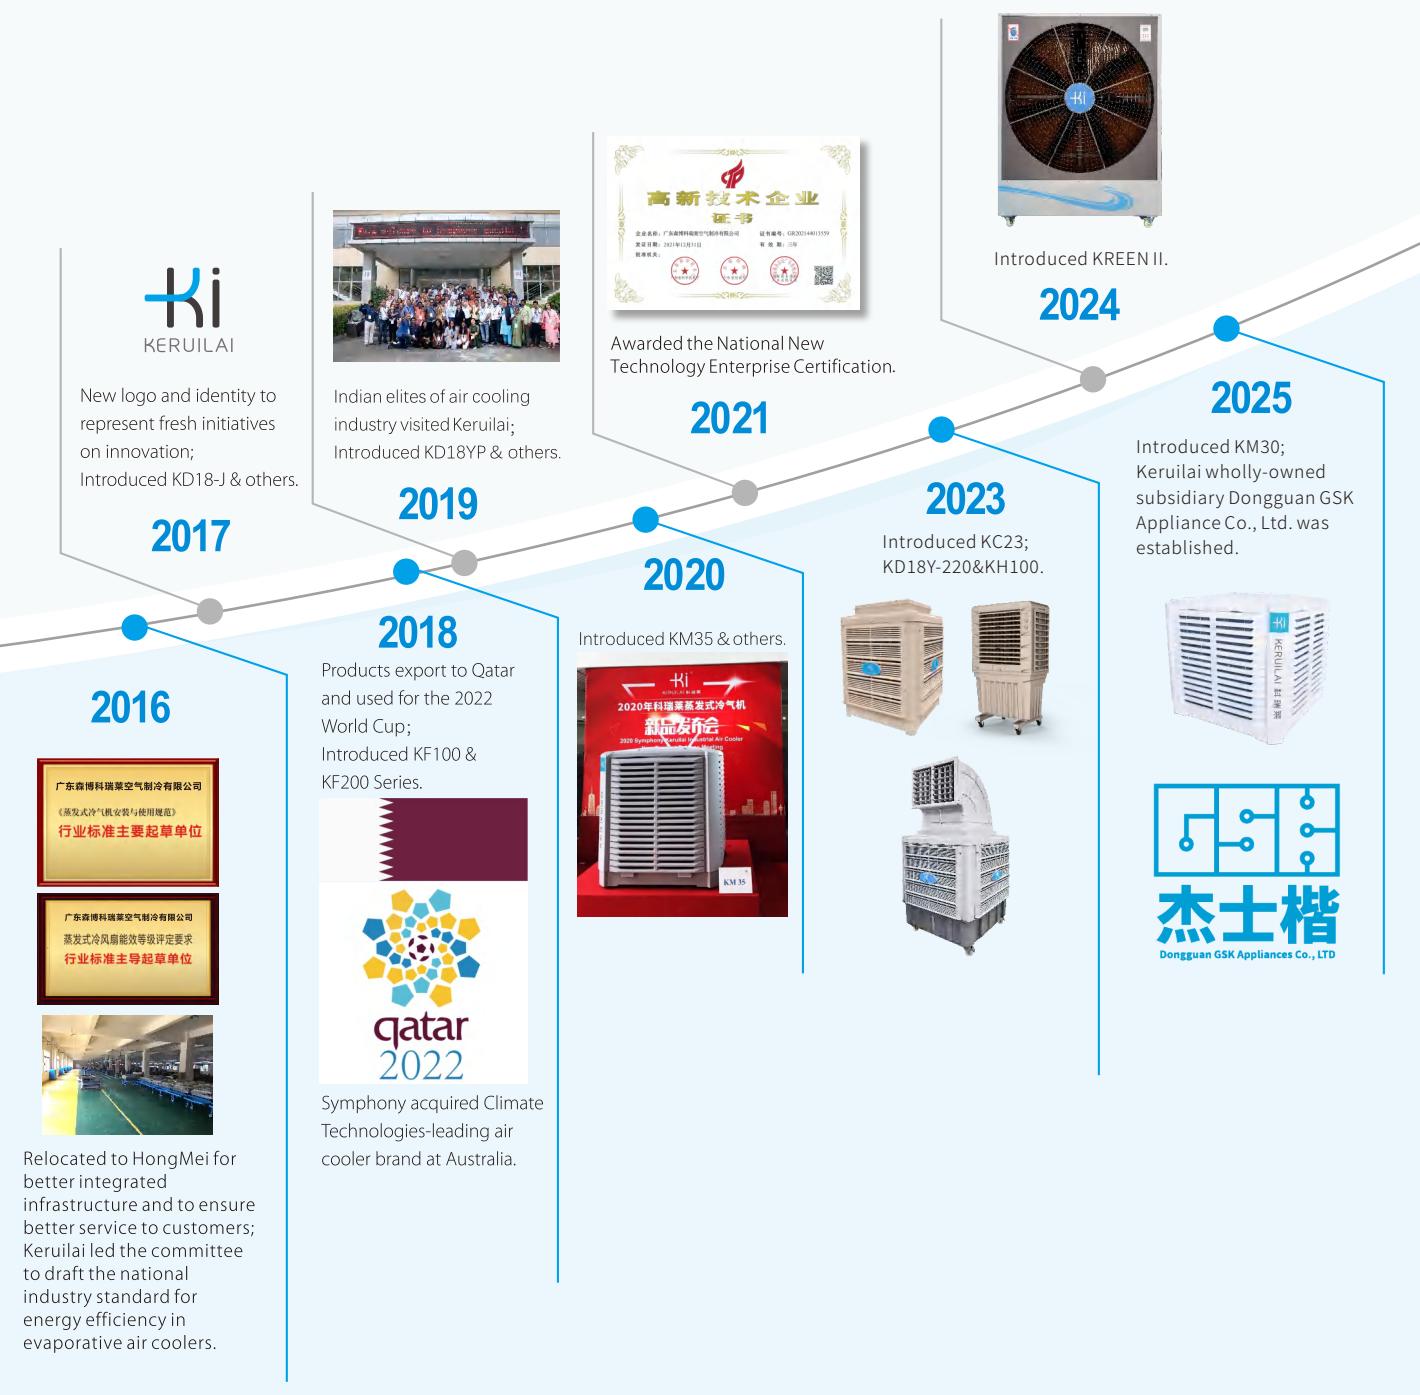

## Keruilai Evaporative Air Cooler

### Structure and Cooling Principle

Keruilai evaporative air cooler is mainly composed of chassis, column, top cover, side frames, evaporative cooling pads, water distributor and other electrical/electronic parts (like motor, pump, inlet solenoid valve, drain valve, water level sensor, controller, PCB) and other miscellaneous parts.



## Working principle of Keruilai Evaporative Air Coolers

Filtered and cooled by an evaporative air cooler, the outdoor fresh air is continuously sent into the indoor space through the air duct and air supply outlets. With the continuous supply of fresh air, the indoor space is in a positive pressure condition, thus the original hot air containing odor and dust will be emitted out of the room, resulting in a cool, ventilated, clean and comfortable environment. Suitable exhaust area and effective exhaust are essential for satisfactory performance of any evaporative air cooling system.



## NASA Research

NASA found and reported in heat stress report CR-1205(1) that temperatures over 75°F negatively affect both the productivity and accuracy of work. The following table is a summary of the relationship identified during NASA tests between temperature, work output and accuracy,



### Effective Temperature °F/°C

75/24	80/27	85/29	90/32	95/35	100/38	105/41
-------	-------	-------	-------	-------	--------	--------

### Loss of Work output

3%	8%	18%	29%	45%	62%	79%
----	----	-----	-----	-----	-----	-----


### Loss in Accuracy

0%	5%	40%	300%	700%	>700%	>700%
----	----	-----	------	------	-------	-------

\*According to NASA Survey

## Human Comfort Zone


Also Known as the thermal comfort zone, this refers to the range of temperature and humidity conditions that most people will find comfortable. Meaning, that people working in such a zone are likely to be at their most productive state.

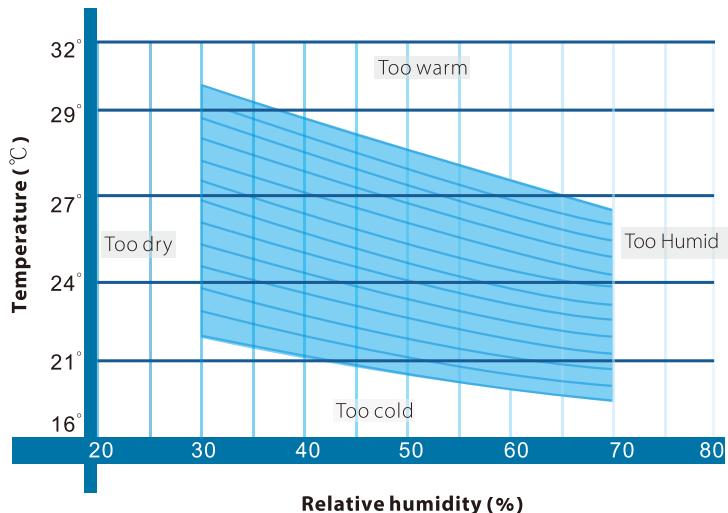

## Temperature Sensation on Human

Air Velocity m/s	Supply Air Temperature °C							
	25	26	27	28	29	30	31	32
8	Equivalent Temperature Sensation on Human °C							°C
	22.1	23.5	24.7	26.5	27.8	29.2	29.8	32.2
9	22.1	23.5	24.7	26.5	27.8	29.2	29.8	31.2
10	22.0	23.3	24.5	26.2	27.4	29	29.6	31
11	22.0	23.2	24.5	26.2	27.4	29	29.6	31
12	21.9	23.1	24.3	26	27.2	28.8	29.4	30.6

## Advantages of Keruilai central air cooling solutions

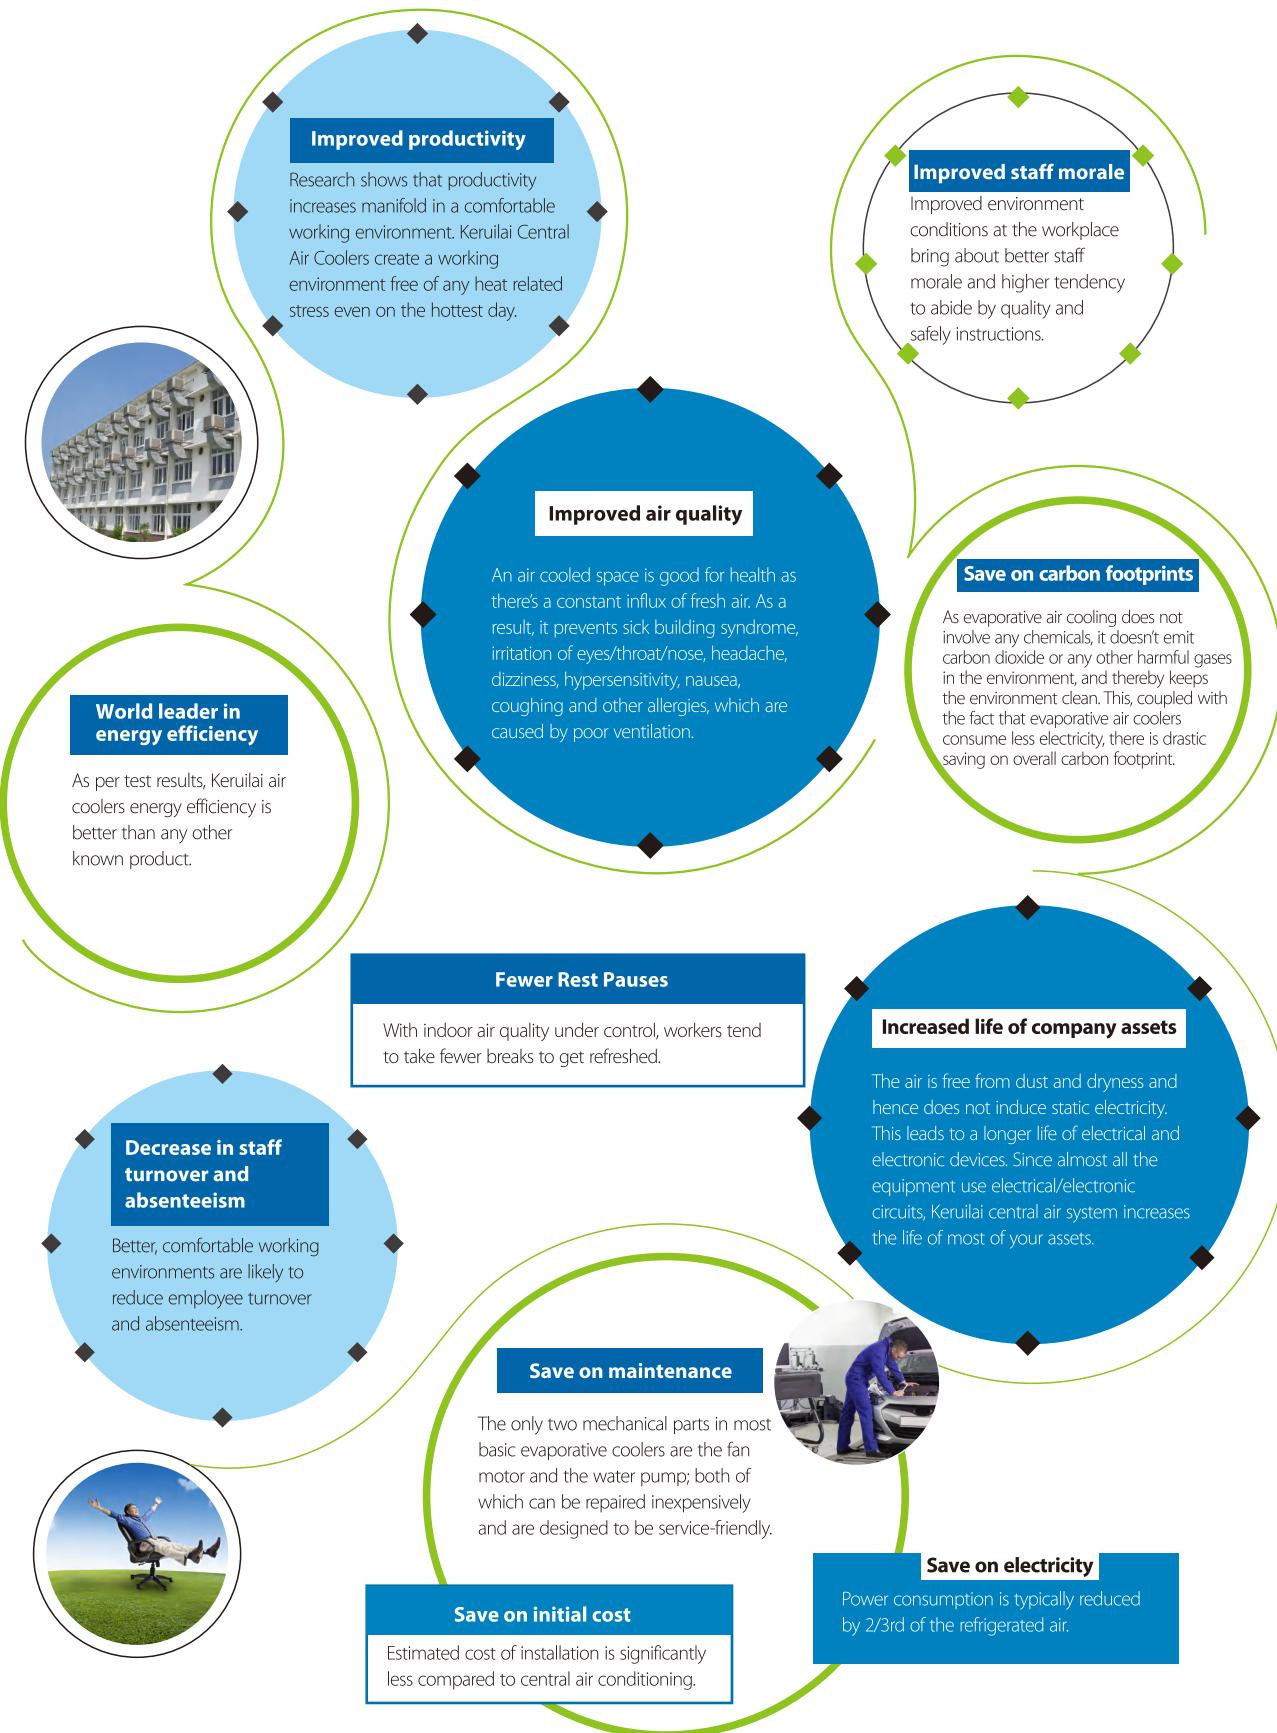

## BONAIRO® Products

### VSS55

Model	VSS55	
Discharge Type	Bottom	
Nominal Max Airflow	m <sup>3</sup> /h	11000
Voltage/Hertz/Phase	V/Hz/Ph	220-240/50/1
Motor Power	KW	0.6
Cooling Capacity*	KW	33
Evaporative Efficiency*	[%]	95
Evaporative Capacity*	L/h	50
Air Outlet Dimensions	mm	550×550
Unit Size (H*W*L)	mm	683 (573)×1192×1192
Net Weight	Kg	61

### Features

- ◆ Techdrive®Motor Technology
- ◆ Bonaire H2Optimiser®
- ◆ Humidity Management System
- ◆ The Enviroseal®Duct Shutter
- ◆ 120mm cooling pads
- ◆ Aerowing®fan
- ◆ High tech computerised control module
- ◆ High tech louvre construction
- ◆ Navigator® Remote Control With Humidity Sensor

### Controller



### Target Applications

- ◆ Workshops
- ◆ Supermarkets
- ◆ Schools
- ◆ Entertainment Centers



\*Under test condition DB38°C/WB23°C

\*Above specifications and external appearance are subject to change without prior notice ,and, actual measurements may vary within +/-10% of specified values.

\*Keruilai's air coolers can provide a silent working environment compared to others.

# KERUILAI Products

## KD18

Model	KD18A	KD18A-V	KD18B	KD18B-V	KD18C	KD18C-V	
Discharge Type	Bottom	Bottom	Side	Side	Top	Top	
Nominal Max Airflow	m <sup>3</sup> /h	18000	18000	18000	18000	18000	
Voltage/Hertz/Phase	V/Hz/Ph	380-415/50/3	<u>220-240/50/1</u> <u>220-240/60/1</u>	380-415/50/3	<u>220-240/50/1</u> <u>220-240/60/1</u>	380-415/50/3	<u>220-240/50/1</u> <u>220-240/60/1</u>
Motor Power	KW	1.1	1.1	1.1	1.1	1.1	
Cooling Capacity*	KW	43	43	43	43	43	
Evaporative Efficiency*	[%]	84	84	80	80	84	
Evaporative Capacity*	L/h	65	65	65	65	65	
Sound Pressure Level @1m	dB(A)	68	68	68	68	68	
Water Tank Volume	L	25	25	35	35	35	
Air Outlet Dimensions	mm	670 × 670	670 × 670	670 × 670	670 × 670	735 × 735	
Unit Size	mm	1100 × 1100 × 1000	1100 × 1100 × 1000	1190 × 1100 × 950	1190 × 1100 × 950	1100 × 1100 × 1020	
Net Weight	Kg	62	62	63	63	66	
Running Weight	Kg	95	95	105	105	108	
Shipping Quantity	40HQ	72(SKD)	72(SKD)	60(SKD)	60(SKD)	62(SKD)	

### Features

- ◆ High performance cooling pads
- ◆ Wired remote controller with running status LED display
- ◆ 9 fan adjustable speeds for single phase (KD18A-V,KD18B-V,KD18C-V)
- ◆ Single speed for 3 phase (KD18A,KD18B,KD18C)
- ◆ Optimized motor and fan to deliver low noise and powerful airflow
- ◆ Auto Clean available to keep tank and water clean all the time and thereby also prevent frequent clogging of pads
- ◆ Easy installation and maintenance
- ◆ High quality air pre-filter to protect the cooling pad

### Target Applications

- ◆ Factory
- ◆ Workshops
- ◆ Supermarkets
- ◆ Schools
- ◆ Entertainment Centers

KD18 (A & C)		KD18B	
CMH	Ext Stat Pre, Pa	CMH	Ext Stat Pre, Pa
8300	175	7500	175
8850	150	8000	150
9900	125	8900	125
10600	100	9500	100
11300	75	10100	75



\*Under test condition DB38°C/WB23°C

\*Above specifications and external appearance are subject to change without prior notice ,and, actual measurements may vary within +/-10% of specified values.

\*Keruilai's air coolers can provide a silent working environment compared to others.

# KD18-J

## Features

- ◆ High performance cooling pads
- ◆ Optimized motor and fan to deliver low noise and powerful airflow
- ◆ Easy installation and maintenance

## Target Applications

- ◆ Factory plants
- ◆ Factory workshops
- ◆ Supermarkets
- ◆ Schools
- ◆ Entertainment Centers

## Note

- ◆ KD18-J is a general-purpose air cooler with its own motor and pump, and without any controls.



KD18-J (A & C)		KD18B-J	
CMH	Ext Stat Pre, Pa	CMH	Ext Stat Pre, Pa
8300	175	7500	175
8850	150	8000	150
9900	125	8900	125
10600	100	9500	100
11300	75	10100	75

Model		KD18A-J	KD18B-J	KD18C-J
Discharge Type		Bottom	Side	Top
Nominal Max Airflow	m <sup>3</sup> /h	18000	18000	18000
Voltage/Hertz/Phase	V/Hz/Ph	220-240/50/1 380-415/50/3	220-240/50/1 380-415/50/3	220-240/50/1 380-415/50/3
Motor Power	KW	1.1	1.1	1.1
Cooling Capacity*	KW	43	43	43
Evaporative Efficiency*	[%]	84	80	84
Evaporative Capacity*	L/h	65	65	65
Sound Pressure Level @1m	dB(A)	68	68	68
Water Tank Volume	L	25	35	35
Air Outlet Dimensions	mm	670×670	670×670	735×735
Unit Size	mm	1100×1100×1000	1190×1100×950	1100×1100×1020
Net Weight	Kg	58	59	62
Running Weight	Kg	91	101	104
Shipping Quantity	40HQ	72(SKD)	60(SKD)	62(SKD)

\*Under test condition DB38°C/WB23°C

\*Above specifications and external appearance are subject to change without prior notice, and, actual measurements may vary within +/-10% of specified values.

\*Keruilai's air coolers can provide a silent working environment compared to others.

Model	KC23A	KC23C
Discharge Type	Bottom	Top
Nominal Max Airflow m <sup>3</sup> /h	23000	23000
Voltage/Hertz/Phase V/Hz/Ph	380-415/50/3	380-415/50/3
Motor Power KW	1.3	1.3
Cooling Capacity* KW	55	55
Evaporative Efficiency* [%]	85	85
Evaporative Capacity* L/h	65	65
Sound Pressure Level @1m dB(A)	69	69
Water Tank Volume L	25	35
Air Outlet Dimensions mm	670×670	735×735
Unit Size mm	1100×1100×1230	1100×1100×1250
Net Weight Kg	66	69
Running Weight Kg	97	111
Shipping Quantity 40HQ	59(SKD)	48(SKD)

## Features

- ◆ High performance cooling pads
- ◆ Optimized motor and fan to deliver low noise and powerful airflow
- ◆ Easy installation and maintenance

## Target Applications

- ◆ Factory plants
- ◆ Factory workshops
- ◆ Supermarkets
- ◆ Schools
- ◆ Entertainment Centers

Controller



KC23A&KC23C	
CMH	Ext Stat Pre, Pa
8380	175
10010	150
11000	125
12006	100
12860	75



\*Under test condition DB38°C/WB23°C

\*Above specifications and external appearance are subject to change without prior notice ,and, actual measurements may vary within +/-10% of specified values.

\*Keruilai's air coolers can provide a silent working environment compared to others.

# KD25

## Features

- ◆ **Innovative fan:** patent axial fan blade with excellent performance.
- ◆ **Eco-efficient:** eer can reach eu standard, more energy-saving
- ◆ **More air flow:** get more airflow than similar size products in existing market
- ◆ **Powerful:** can running with longer air duct than normally cooler.
- ◆ **Quiet:** noise is lower than those similar products under the same condition of air pressure.
- ◆ **High cooling efficiency:** larger size pad, high quality pad to guarantee long-term effective cooling.
- ◆ Wired remote controller with running status LED display
- ◆ Optimized motor and fan to deliver low noise and powerful airflow
- ◆ Auto clean available to keep tank and water clean all the time and thereby also prevent frequent clogging of pads
- ◆ High quality air re-filter to protect the cooling pad
- ◆ Optional Single speed (KD25A & KD25C) and 12 speeds (KD25A-V & KD25C-V)



## Target Applications

- ◆ Automobile Assemble and Accessories Factories
- ◆ Plastic Injection and Rubber Factories
- ◆ Textile Mills
- ◆ Hardware Processing Factories
- ◆ Maintenance Workshops of High-Speed Trains
- ◆ Parks

KD25 (A & C)	
CMH	Ext Stat Pre, Pa
11800	175
12600	150
13400	125
14100	100
15000	75

Model		KD25A	KD25A-V	KD25C	KD25C-V
Discharge Type		Bottom	Bottom	Top	Top
Nominal Max Airflow	m³ /h	25000	25000	25000	25000
Voltage/Hertz/Phase	V/Hz/Ph	380-415/50/3	220-240/50/1 220-240/60/1	380-415/50/3	220-240/50/1 220-240/60/1
Motor Power	KW	1.5	1.5	1.5	1.5
Cooling Capacity*	KW	65	65	65	65
Evaporative Efficiency*	[%]	90	90	90	90
Evaporative Capacity*	L/h	80	80	80	80
Sound Pressure Level @1m	dB(A)	69	69	69	69
Water Tank Volume	L	25	25	35	35
Air Outlet Dimensions	mm	670 × 670	670 × 670	735 × 735	735 × 735
Unit Size	mm	1100 × 1100 × 1230	1100 × 1100 × 1230	1100 × 1100 × 1250	1100 × 1100 × 1250
Net Weight	Kg	70	70	73	73
Running Weight	Kg	101	101	115	115
Shipping Quantity	40HQ	59(SKD)	59(SKD)	48 (SKD)	48 (SKD)

\*Under test condition DB38°C/WB23°C

\*Above specifications and external appearance are subject to change without prior notice, and, actual measurements may vary within +/-10% of specified values.

\*Keruilai's air coolers can provide a silent working environment compared to others.

# KM35

## Features

- ◆ High performance cooling pads
- ◆ Wired remote controller with running status LED display
- ◆ Optimized motor and fan to deliver low noise and powerful airflow
- ◆ Auto Clean available to keep tank and water clean all the time and thereby also prevent frequent clogging of pads
- ◆ Easy installation and maintenance
- ◆ High quality air pre-filter to protect the cooling pad
- ◆ Optional Single speed (KM35A & KM35C) and 12 speeds (KM35A-V & KM35C-V)

## Target Applications

- ◆ Automobile Assemble and Accessories Factories
- ◆ Plastic Injection and Rubber Factories
- ◆ Textile Mills
- ◆ Hardware Processing Factories
- ◆ Maintenance Workshops of High-Speed Trains
- ◆ Parks

KM35/KM35-V(A&C)	
CMH	Ext Stat Pre, Pa
175.00	175
20000	150
24700	125
29300	100
32500	75



Model	KM35A	KM35A-V	KM35C	KM35C-V	
Discharge Type	Bottom	Bottom	Top	Top	
Nominal Max Airflow	m³/h	35000	35000	35000	
Voltage/Hertz/Phase	KW/A/ph	380-415/50/3	380-415/50/3 380-415/60/3 460/60/3	380-415/50/3	380-415/50/3 380-415/60/3 460/60/3
Motor Power	KW	3.0	3.0	3.0	
Cooling Capacity*	KW	97	97	97	
Evaporative Efficiency*	[%]	90	90	90	
Evaporative Capacity*	L/h	145	145	145	
Sound Pressure Level @1m	dB(A)	74	74	74	
Water Tank Volume	L	40	40	40	
Air Outlet Dimensions	mm	777×777	777×777	777×777	
Unit Size	mm	1225×1225×1350	1225×1225×1350	1225×1225×1370	
Net Weight	Kg	103	103	113	
Running Weight	Kg	171	171	181	
Shipping Quantity	40HQ	40 (SKD)	40 (SKD)	40 (SKD)	

\*Under test condition DB38°C/WB23°C

\*Above specifications and external appearance are subject to change without prior notice, and, actual measurements may vary within +/-10% of specified values.

\*Keruilai's air coolers can provide a silent working environment compared to others.

# KM30

Model	KM30A		KM30B		KM30C	
Discharge Type	Bottom		Side		Top	
Nominal Max Airflow	m <sup>3</sup> /h	30000	30000	30000	30000	30000
Voltage/Hertz/Phase	V/Hz/Ph	380-415/50/3	380-415/50/3	380-415/50/3	380-415/50/3	380-415/50/3
Motor Power	KW	2.2	2.2	2.2	2.2	2.2
Cooling Capacity*	KW	80	80	80	80	80
Evaporative Efficiency*	[%]	90	90	90	90	90
Evaporative Capacity*	L/h	117	117	117	117	117
Sound Pressure Level @1m	dB(A)	72	72	72	72	72
Water Tank Volume	L	40	40	40	40	40
Air Outlet Dimensions	mm	777x777	777x777	777x777	777x777	777x777
Unit Size	mm	1225x1225x1125	1305x1225x1125	1225x1225x1145	1225x1225x1145	1225x1225x1145
Net Weight	Kg	87	86	86	88	88
Running Weight	Kg	141	137	137	142	142
Shipping Quantity	40HQ	45(SKD)	45(SKD)	45(SKD)	45(SKD)	45(SKD)

## Features

- ◆ High performance cooling pads
- ◆ Wired remote controller with running status LED display
- ◆ 12 fan adjustable speeds(optional)
- ◆ Auto-clean available to prolong the service life of the cooling pads
- ◆ High quality air pre-filter to protect the cooling pad
- ◆ High Performance Cooling Pads
- ◆ Auto-clean available to prolong the service life of the cooling pads
- ◆ Low noise with special designed axial-flow fan
- ◆ Single speed

## Target Applications

- ◆ General manufacturing
- ◆ Warehouses
- ◆ Workshops
- ◆ Repair / maintenance areas
- ◆ Offices
- ◆ Laundries / dry cleaners
- ◆ Shops
- ◆ Institutional facilities
- ◆ Restaurants and clubs



KM30(A&C)		KM30B	
CMH	Ext Stat Pre, Pa	CMH	Ext Stat Pre, Pa
9500	175	9000	175
10900	150	9900	150
11900	125	10750	125
14100	100	12700	100
15700	75	14100	75

\*Under test condition DB38°C/WB23°C

\*Above specifications and external appearance are subject to change without prior notice ,and, actual measurements may vary within +/-10% of specified values.

\*Keruilai's air coolers can provide a silent working environment compared to others.

# KS30/KS36

## Features

- ◆ High performance cooling pads
- ◆ Compact and light-weight design to facilitate the installation and transportation
- ◆ Stainless steel chassis to extend the service life
- ◆ Auto Clean available to keep tank and water clean all the time and thereby also prevent frequent clogging of pads
- ◆ High quality air pre-filter to protect the cooling pad
- ◆ Easy to operate and maintain
- ◆ KS30A/B and KS36A/B with single speed
- ◆ 12 adjustable fan speeds for "V" version

## Target Applications

- ◆ Factory
- ◆ Workshops
- ◆ Supermarkets
- ◆ Schools
- ◆ Entertainment Centers



Ext Stat Pre, Pa	CMH		Ext Stat Pre, Pa	CMH	
	KS30A/KS30A-V	KS30B/KS30B-V		KS36A/KS36A-V	KS36B/KS36B-V
175	15400	14700	225	15800	15000
150	18500	17600	200	18900	18000
125	20200	19200	175	22100	21000
100	22100	21000	150	24900	23700
75	23100	22000	125	26000	24800

Model		KS30A/KS30A-V		KS30B/KS30B-V		KS36A/KS36A-V		KS36B/KS36B-V	
Discharge Type		Bottom		Side		Bottom		Side	
Nominal Max Airflow		m³/h		30000		30000		36000	
Voltage/Hertz/Phase		V/Hz/Ph		220/60/3 380-415/50/3 380-415/60/3 460/60/3	380-415/50/3 380-415/60/3 460/60/3	220/60/3 380-415/50/3 380-415/60/3 460/60/3	380-415/50/3 380-415/60/3 460/60/3	220/60/3 380-415/50/3 380-415/60/3 460/60/3	380-415/50/3 380-415/60/3 460/60/3
Motor Power		KW		2.2		2.2		3.0	
Cooling Capacity*		KW		80		80		100	
Evaporative Efficiency*		[%]		86		86		86	
Evaporative Capacity*		L/h		117		117		150	
Sound Pressure Level @1m		dB(A)		78		78		80	
Water Tank Volume		L		65		65		65	
Air Outlet Dimensions		mm		800 × 800		800 × 800		800 × 800	
Unit Size		mm		1500 × 1500 × 1380		1500 × 1580 × 1380		1500 × 1500 × 1380	
Net Weight		Kg		175		170		160	
Running Weight		Kg		270		255		255	
Shipping Quantity		40HQ		7		7		7	

\*Under test condition DB38°C/WB23°C

\*Above specifications and external appearance are subject to change without prior notice, and, actual measurements may vary within +/-10% of specified values.

\*Keruilai's air coolers can provide a silent working environment compared to others.

# KT25/40

Model	KT25B	KT40A	KT40B	KT40C
Discharge Type	Side	Bottom	Side	Top
Nominal Max Airflow m <sup>3</sup> /h	25000	40000	40000	40000
Voltage/Hertz/Phase V/Hz/Ph	380-415/50/3 220/60/3	380-415/50/3 220/60/3	380-415/50/3 220/60/3	380-415/50/3 220/60/3
Motor Power KW	5.5	7.5	7.5	7.5
Cooling Capacity* KW	80	150	150	150
Evaporative Efficiency* [%]	84	84	84	84
Evaporative Capacity* L/h	117	220	220	220
Sound Pressure Level @1m dB(A)	82.5	82.5	82.5	82.5
Water Tank Volume L	65	80	80	80
Air Outlet Dimensions mm	620 × 571	702 × 780	702 × 780	702 × 780
Unit Size mm	1470x1490x1358	1770 × 1770 × 1380	1770 × 1770 × 1380	1770 × 1770 × 1440
Net Weight Kg	300	450	450	430
Running Weight Kg	375	555	555	545
Shipping Quantity 40HQ	7	6	6	6

## Features

- ◆ High air pressure and long distance air delivery
- ◆ High performance cooling pads
- ◆ Stainless steel chassis to extend the service life
- ◆ Auto Clean available to keep tank and water clean all the time and thereby also prevent frequent clogging of pads
- ◆ High quality air pre-filter to protect the cooling pad
- ◆ Easy to operate and maintain

## Target Applications

- ◆ Factory
- ◆ Large workshops
- ◆ Supermarkets
- ◆ Entertainment Centers
- ◆ Hospitals



CMH	KT25B		CMH		Ext Stat Pre, Pa
	Ext Stat Pre, Pa	KT40B	KT40C	Ext Stat Pre, Pa	
15600	250	21000	22400	350	
16800	225	24000	25200	325	
17800	175	27500	28500	300	
18900	150	30000	30800	275	
19900	125	32000	32600	250	

\*Under test condition DB38°C/WB23°C

\*Above specifications and external appearance are subject to change without prior notice, and, actual measurements may vary within +/-10% of specified values.

\*Keruilai's air coolers can provide a silent working environment compared to others.

# KT60/70

Model	KT60B	KT60C	KT70C
Discharge Type	Side	Top	Top
Nominal Max Airflow m <sup>3</sup> /h	60000	60000	70000
Voltage/Hertz/Phase V/Hz/Ph	<u>380-415/50/3</u> <u>460/60/3</u>	<u>380-415/50/3</u> <u>460/60/3</u>	380/50/3
Motor Power KW	15	15	22
Cooling Capacity* KW	260	260	300
Evaporative Efficiency* [%]	84	84	92
Evaporative Capacity* L/h	380	380	430
Sound Pressure Level @1m dB(A)	86	86	89
Water Tank Volume L	100	100	100
Air Outlet Dimensions mm	831 × 924	837 × 931	837*931
Unit Size mm	2055 × 1970 × 1704	1970 × 1970 × 1754	1970*1970*1754
Net Weight Kg	630	625	630
Running Weight Kg	755	760	765
Shipping Quantity 40HQ	5	5	5

## Features

- ◆ High air pressure and long distance air delivery
- ◆ High performance cooling pads
- ◆ Stainless steel chassis to extend the service life
- ◆ Auto Clean available to keep tank and water clean all the time and thereby also prevent frequent clogging of pads
- ◆ High quality air pre-filter to protect the cooling pad
- ◆ Easy to operate and maintain

## Target Applications

- ◆ Factory
- ◆ Large workshops
- ◆ Supermarkets
- ◆ Entertainment Centers
- ◆ Hospitals



CMH		Ext Stat Pre, Pa
KT60B	KT60C	
21800	22900	500
32300	33900	450
35700	37500	400
40000	42000	350
43300	45500	300

\*Under test condition DB38°C/WB23°C

\*Above specifications and external appearance are subject to change without prior notice, and, actual measurements may vary within +/-10% of specified values.


\*Keruilai's air coolers can provide a silent working environment compared to others.

### KREEN II


NEW

#### Features

- ◆ Aesthetically appealing High Quality stainless-steel cooler
- ◆ Fresh Air flow at the body level
- ◆ Advanced Vortex air flow to cover large area effectively
- ◆ Mixing of Secondary Air stream and fresh air to improve cooling efficiency
- ◆ Large air outlet for more air
- ◆ Double layered grid at the outlet to ensure highest safety
- ◆ 12 level air speed options
- ◆ Continuous water supply connection through float valve
- ◆ Heavy Duty universal casters for easy mobility

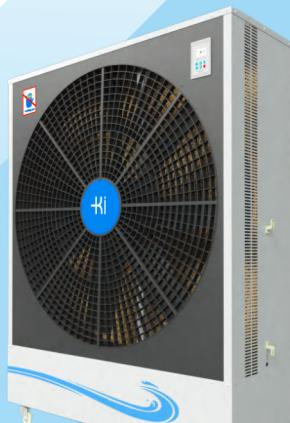

#### Controller

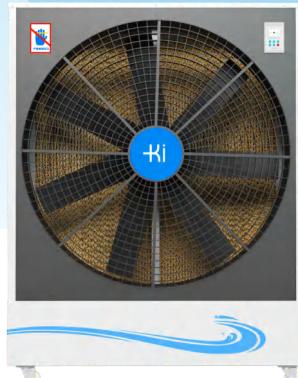

KREEN II

Model	KREEN II	
Nominal Max Airflow	$\text{m}^3/\text{h}$	40000
Voltage/Hertz/Phase	V/Hz/Ph	220-240/50/1 220-240/60/1
Power Consumption	W	750
Sound Pressure Level	dB(A)	68
Water Tank Volume	L	200
Air Outlet Dimensions	mm	1306*1370
Unit Size	mm	1380*500*1800
Net weight	kg	91
Running Weight	kg	291
Shipping Quantity	40HQ	32

\*All products are subject to continuous improvement. Above specifications and external appearance are subject to change without notice. All values specified are under ideal test conditions, and, actual values may vary between +/- 10% of the specified values.  
\*Keruilai's air coolers can provide a silent working environment compared to others.

# KD18YPT-220/KD18YP-220

## KD18YPT-220

### Features

- ◆ Ventilation and cooling
- ◆ Suitable for an area within 150 square meters
- ◆ Connects to water supply system for continuous supply
- ◆ Movable stand and water tank
- ◆ Easy for operation and installation
- ◆ Single speed controller for motor and pump using protection switch



## KD18YP-220

### Features

- ◆ Ventilation and cooling
- ◆ Auto-clean for water refresh circulating
- ◆ Suitable for an area within 150 square meters
- ◆ 12 adjustable fan speeds
- ◆ Connects to water supply system for continuous supply
- ◆ Movable stand and water tank

### Controller



### Target Applications

- ◆ Workshops
- ◆ Factories
- ◆ Supermarkets
- ◆ Schools
- ◆ Entertainment centers

### Model

### KD18YP-220

### KD18YPT-220

Model	KD18YP-220	KD18YPT-220
Discharge Type	top	top
Nominal Max Airflow	m³ /h	18000
Voltage/Hertz/Phase	V/Hz/Ph	220-240/50/1 220-240/60/1
Motor Power	KW	1.1
Cooling Capacity*	KW	50
Evaporative Efficiency*	[%]	90
Evaporative Capacity*	L/h	72
Sound Pressure Level @1m	dB(A)	68
Water Tank Volume	L	220
Air Outlet Dimensions	mm	695 × 490
Unit Size	mm	1100 × 1100 × 2040
Net Weight	Kg	94
Running Weight	Kg	136
Shipping Quantity	40HQ	34(SKD)

\*Under test condition DB38°C/WB23°C

\*Above specifications and external appearance are subject to change without prior notice, and, actual measurements may vary within +/-10% of specified values.  
\*Keruilai's air coolers can provide a silent working environment compared to others.

# KH100-125/KH100-125T

Model		KH100-125	KH100-125T
Nominal Max Airflow	m <sup>3</sup> /h	9000	9000
Voltage/Hertz/Phase	V/Hz/Ph	220-240/50/1 220-240/60/1 100-127/60/1	220-240/50/1 220-240/60/1 100-127/60/1
Power Consumption	W	250	250
Sound Pressure Level	dB(A)	64	64
Water Tank Volume	L	125	125
Air Outlet Dimensions	mm	570 × 580	570 × 580
Unit Size	mm	860 × 530 × 1425	860 × 530 × 1425
Net weight	kg	26	26
Running Weight	kg	135	135
Shipping Quantity	40HQ	121	121

## Features

- ◆ Suitable for outdoor applications
- ◆ Rugged body - suitable for commercial and industrial use
- ◆ High performance 5090 honeycomb pads on all three sides
- ◆ Large capacity water tank
- ◆ Water inlet float valve
- ◆ Long distance air throw
- ◆ High quality air filters to protect cooling pad
- ◆ Three wind speeds
- ◆ Optional remote control
- ◆ Strong wheels for easy portability
- ◆ Easy removable pads, for ease of cleaning

## Target Applications

- ◆ Workshops ◆ Banquet halls
- ◆ Indoor stadium ◆ Factories
- ◆ Hospitals ◆ Warehouses
- ◆ Restaurants ◆ Shops
- ◆ Gyms ◆ Bus stations
- ◆ Banks ◆ Religious places
- ◆ Railway stations ◆ Schools and colleges
- ◆ Poultry farms ◆ Outdoor events
- ◆ Canteens ◆ Horse stables
- ◆ Residences ◆ Film studios



\*All products are subject to continuous improvement. Above specifications and external appearance are subject to change without notice. All values specified are under ideal test conditions, and, actual values may vary between +/- 10% of the specified values.  
\*Keruilai's air coolers can provide a silent working environment compared to others.

# KF100-180/KF100-180T

## Features

- ◆ Suitable for outdoor applications
- ◆ Rugged body - suitable for commercial and industrial use
- ◆ High performance honeycomb pads on all three sides
- ◆ Large capacity water tank
- ◆ Water inlet float valve
- ◆ Long distance air throw
- ◆ High quality air filters to protect cooling pad
- ◆ Three wind speeds
- ◆ Optional remote control
- ◆ Strong wheels for easy portability
- ◆ Easy removable pads, for ease of cleaning
- ◆ Can run on inverter

## Target Applications

- ◆ Workshops
- ◆ Indoor stadium
- ◆ Hospitals
- ◆ Restaurants
- ◆ Gyms
- ◆ Banks
- ◆ Railway stations
- ◆ Poultry farms
- ◆ Canteens
- ◆ Residences
- ◆ Banquet halls
- ◆ Factories
- ◆ Warehouses
- ◆ Shops
- ◆ Bus stations
- ◆ Religious places
- ◆ Schools and colleges
- ◆ Outdoor events
- ◆ Horse stables
- ◆ Film studios



KF100-180

KF100-180T

Model	KF100-180		KF100-180T
Nominal Max Airflow	m <sup>3</sup> /h	9000	9000
Voltage/Hertz/Phase	V/Hz/Ph	220-240/50/1 220-240/60/1 100-127/60/1	220-240/50/1 220-240/60/1 100-127/60/1
Power Consumption	W	250	250
Sound Pressure Level	dB(A)	64	64
Water Tank Volume	L	180	180
Air Outlet Dimensions	mm	570 × 580	570 × 580
Unit Size	mm	860 × 530 × 1660	860 × 530 × 1660
Net weight	kg	29.5	29.5
Running Weight	kg	173	173
Shipping Quantity	40HQ	96	96

\*All products are subject to continuous improvement. Above specifications and external appearance are subject to change without notice. All values specified are under ideal test conditions, and, actual values may vary between +/- 10% of the specified values.  
\*Keruilai's air coolers can provide a silent working environment compared to others.

# KF200-125 / KF200-125T

## Features

- ◆ Suitable for outdoor applications
- ◆ Rugged body - suitable for commercial and industrial use
- ◆ High performance honeycomb pads on all three sides
- ◆ Large capacity water tank
- ◆ Water inlet float valve
- ◆ Long distance air throw
- ◆ High quality air filters to protect cooling pad
- ◆ Three wind speeds
- ◆ Optional remote control
- ◆ Strong wheels for easy portability
- ◆ Easy removable pads, for ease of cleaning
- ◆ Can run on inverter

## Target Applications

- ◆ Workshops
- ◆ Indoor stadium
- ◆ Hospitals
- ◆ Restaurants
- ◆ Gyms
- ◆ Banks
- ◆ Railway stations
- ◆ Poultry farms
- ◆ Canteens
- ◆ Residences
- ◆ Banquet halls
- ◆ Factories
- ◆ Warehouses
- ◆ Shops
- ◆ Bus stations
- ◆ Religious places
- ◆ Schools and colleges
- ◆ Outdoor events
- ◆ Horse stables
- ◆ Film studios



KF200-125

KF200-125T

Model	KF200-125			KF200-125T			Benefit
Nominal Max Airflow	m <sup>3</sup> /h			18000			Powerful Cooling
Voltage/Hertz/Phase	V/Hz/Ph	220-240/50/1		220-240/60/1 100-127/60/1	220-240/50/1	220-240/60/1 100-127/60/1	
Power Consumption	W	425	500	425	500		Low Power Consumption
Sound Pressure Level	dB(A)	68		68			Silent
Water Tank Volume	L	125		125			Last very long
Air Outlet Dimensions	mm	(570 × 580) × 2			(570 × 580) × 2		Wide Coverage
Unit Size	mm	860 × 530 × 2180			860 × 530 × 2180		Compact Size
Net weight	kg	39.5		39.5			
Running Weight	kg	150		150			
Shipping Quantity	40HQ	61		61			

\*All products are subject to continuous improvement. Above specifications and external appearance are subject to change without notice. All values specified are under ideal test conditions, and, actual values may vary between +/- 10% of the specified values.

\*Keruihai's air coolers can provide a silent working environment compared to others.

# KF100-180S

Model		KH100-180S
Nominal Max Airflow	m <sup>3</sup> /h	9000
Voltage/Hertz/Phase	V/Hz/Ph	AC 220-240/50 or 60/1 AC 100-127/60/1 DC 24V
Power Consumption	W	250
Sound Pressure Level	dB(A)	64
Water Tank Volume	L	180
Air Outlet Dimensions	mm	570 × 580
Unit Size	mm	860 × 530 × 1660
Net weight	kg	41.5
Running Weight	kg	180
Shipping Quantity	40HQ	96
Running time on battery	H	3-4 hours depending upon speed selection
Battery Charging time	H	8 hours for full charge

## Features

- ◆ Suitable for outdoor applications
- ◆ Rugged body - suitable for commercial and industrial use
- ◆ High performance honeycomb pads on all three sides
- ◆ Large capacity water tank
- ◆ Water inlet float valve
- ◆ Long distance air throw
- ◆ High quality air filters to protect cooling pad
- ◆ Three wind speeds
- ◆ Remote control
- ◆ Strong wheels for easy portability
- ◆ Easy removable pads, for ease of cleaning
- ◆ Built-in battery (rechargeable) and can directly connect to solar panel power design
- ◆ Can run on its own battery (for limited time), or, on external AC power supply, or, on external DC power supply



Note: Solar panel and battery are not part of our product, customer can buy them and fix in the product.

\*All products are subject to continuous improvement. Above specifications and external appearance are subject to change without notice. All values specified are under ideal test conditions, and, actual values may vary between +/- 10% of the specified values.  
\*Keruilai's air coolers can provide a silent working environment compared to others.

# Keruilai Applications

## Outdoor applications



Outdoor Event



Outdoor Area of an Olympic Venue



Villa Garden



Zoo



Golf Driving Range



Outdoor Recreation




Exhibition Center

## Factory & workshop applications



Furniture Factory

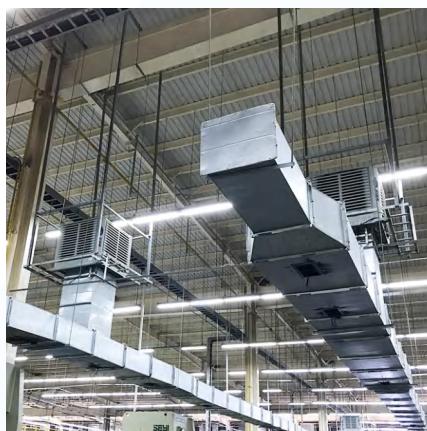

Metal Factory



Textile Mill




Hardware Processing Factory



Diecasting Factory



Automobile Assemble line

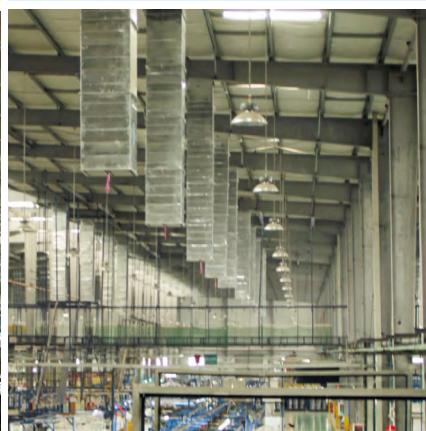

Electronic Mechanical Factory

## Other applications




Bullet Train Maintenance Shop



Automobile Maintenance Shop



Logistic Warehouse

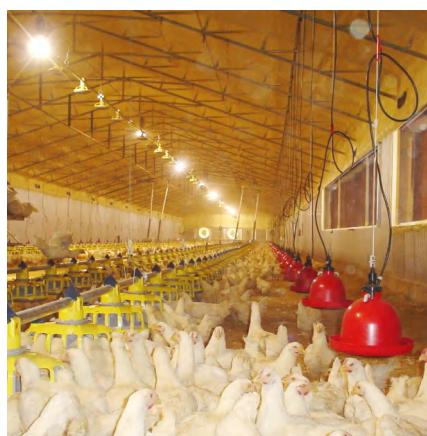

Chicken Farm



Logistics Workshop



Livestock Farm



Saddle Club

## Our Customers



## Global Quality Certification:



**Guangdong Symphony Keruilai Air Coolers Co., Ltd.**

Manufacturing Base: No.3 Hongjin Road, Hongmei Town, Dongguan City , Guangdong Province ,China

Hotline: +86 769 2218 8788 Ext. 963/857

Website: [www.keruilai.com](http://www.keruilai.com)

Email: [info@keruilai.com](mailto:info@keruilai.com)

Keruilai reserves the right to make alterations to specifications, quantities, etc., for production or other reasons, subsequent to publication  
©Guangdong Symphony Keruilai Air Coolers Co., Ltd .

202508